



UIM

Mini UIG

Key Features


- 6 inputs which each can be individually configured as 0-5V analogue, digital or photoelectric cell inputs
- 8 sequences with up to 30 steps per sequence
- Only 45mm Ø so easily fits in European and UK junction / back boxes
- Configuration stored in Non Volatile EEPROM
- Firmware storage in reflashable FLASH memory over iCAN network
- Configurable start up mode
- CE & UKCA compliant to all relevant standards
- Designed and manufactured to ISO9001 standard



Overview

iLight network powered universal interface with Six configurable inputs. Can be dry loop contact closure for scene selection or 0-5V analogue inputs. 45mm diameter potted PCB with 20cm flying leads, designed to fit European back boxes and ideal for connection to "dumb" push buttons and rocker switches. Does not include LED tellback.

Dimensions

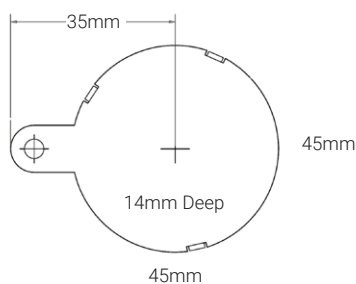

Contact Us

+44 (0)1923 495495

enquiries@iLight.co.uk

www.iLight.co.uk

iLight
A brand of Signify
Usk House, Llantarnam Park
Cwmbran, NP44 3HD, UK

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions.

© 2022 Signify Holding
All Rights Reserved

iLight is a registered trademark.
All other trademarks are property of their respective owners.

UIM Rev10 1121